



 **Lifebox asia**



We are new generation company with the core advantage of outstanding product.

## **About us.**

We're specializes in designing, developing and manufacturing high quality well-being products for global consumers. Our company was established in 2019.

Lifebox Asia's products have already sold in Thailand market and we plan to sale to overseas countries such as CLMV and so on. It is in a good position not only to serve Thailand market, but also plan to export all over the world.




## **Our culture**

Lifebox Asia, Rich cultural background can produce strong cohesion and vitality, promote team cooperation and innovation consciousness, and is the source and power of sustainable development of enterprises.



## Office

**Lifebox Asia Company Limited (Head Office)**

26, Soi Sukhumvit 62, Phra Khanong Tai, Phra Khanong, Bangkok 10260

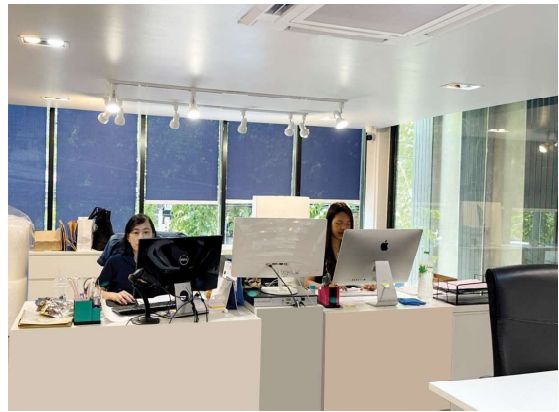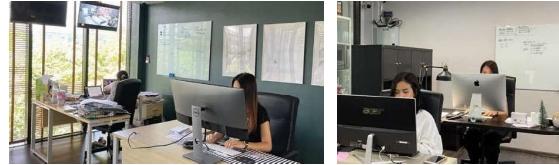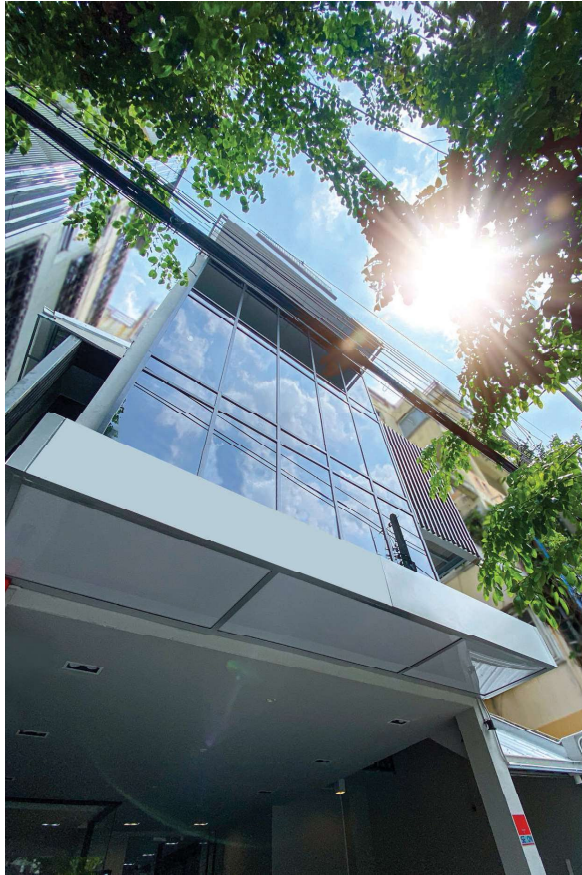

## Warehouse

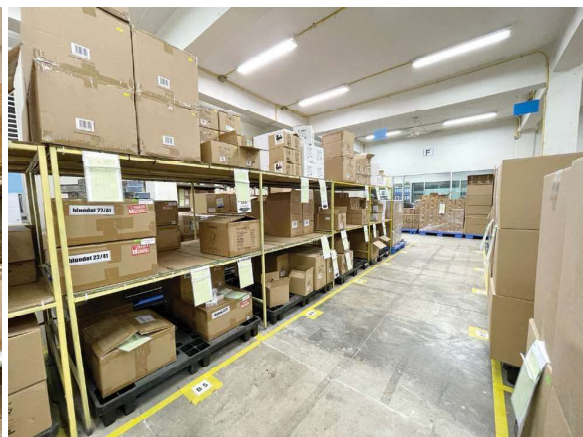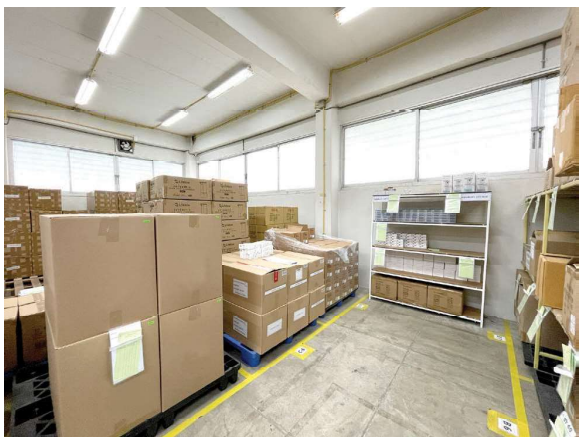

## Our Brands



blue dot™


One Home



## BLOOD PRESSURE MONITOR

### Model: B-BM071

- Transfer data via Bluetooth to Smart bluedot app in a smartphone
- All blood pressure values
- Average value of the last 7 days
- Blood Pressure Trends of the specified period of the past 7 days
- Cuff wearing OK
- LCD display White illuminated, XXL 124 x 76 mm.
- Arrhythmia detection
- Excessive body motion detection
- Risk indicator
- 2 user ID memories for 250 measurements each
- Guest mode
- For upper arm circumferences from 22-42 cm.
- Data and time / automatic switch-off
- Low battery indicator
- Works with 4 AA 1.5V batteries and adapter.
- Size approx. 100(W) x 174(L) x 41(H) mm.
- Weight approx. 329 g. (Excluding the batteries and cuff)
- Measurement range Pressure: 0 mmHg~299 mmHg  
Pulse value: (40-199) beat/minute
- Accuracy Pressure:  $\pm 3$  mmHg  
Pulse value:  $\pm 5\%$

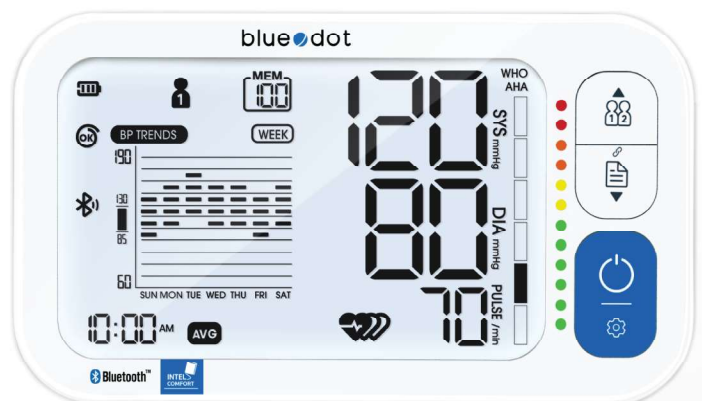

Download Application  
"Smart bluedot" Free

works with



Smart bluedot



Compatible with  
• ios 12.0 or higher  
• Android 6.0 or higher

**3 years warranty**

EAN no.:8857127365145  
09.2022\_REV.0000

# blue dot

Model: B-BM01











## Automatic digital BLOOD PRESSURE MONITOR

- Talking Customizable
- LCD screen with orange lights, Size : 65 x 90 mm.
- Intel Comfort
- Irregular heartbeat detection
- Motion detection
- Risk indicator (WHO standard)
- Average of the last 3 measurements
- 60 Memories / person ( 2 person )
- For upper arm circumferences from 22-42 cm.
- Automation switch-off
- Low battery indicator
- Incl. 4 x 1.5V AA batteries
- Size 110(W) x 150(L) x 70(H) mm.
- Weight 310 g. (without batteries)
- Measuring Range: Cuff Pressure: 0-290 mmHg  
Pulse: 40~180 bpm
- Accuracy: Pressure:  $\pm 3$  mmHg  
Pulse:  $\pm 5\%$  of the reading

**FREE**

Bag | Adapter

-  Talking (Customizable)
-  LCD Display
-  Intel Comfort
-  Arrhythmia Detection
-  Motion Detector
-  Double Users
-  WHO Indicator
-  Adapter/AA x 4 Battery

EAN no.: .....to be confirm.....

12.2022\_REV.0000


# blue dot

Model: B-BM02



## Automatic digital BLOOD PRESSURE MONITOR

- LCD screen, Size : 65 x 90 mm.
  - Intel Comfort
  - Irregular heartbeat detection
  - Motion detection
  - Risk indicator (WHO standard)
  - Average of the last 3 measurements
  - 60 Memories / person ( 2 person )
  - For upper arm circumferences from 23-33 cm.
  - Automation switch-off
  - Low battery indicator
  - Incl. 4 x 1.5V AA batteries
  - Size 110(W) x 150(L) x 74(H) mm.
  - Weight 330 g. (without batteries)
- Measuring Range: Cuff Pressure: 0-290 mmHg  
Pulse: 40~180 bpm
- Accuracy: Pressure:  $\pm 3$  mmHg  
Pulse:  $\pm 5\%$  of the reading

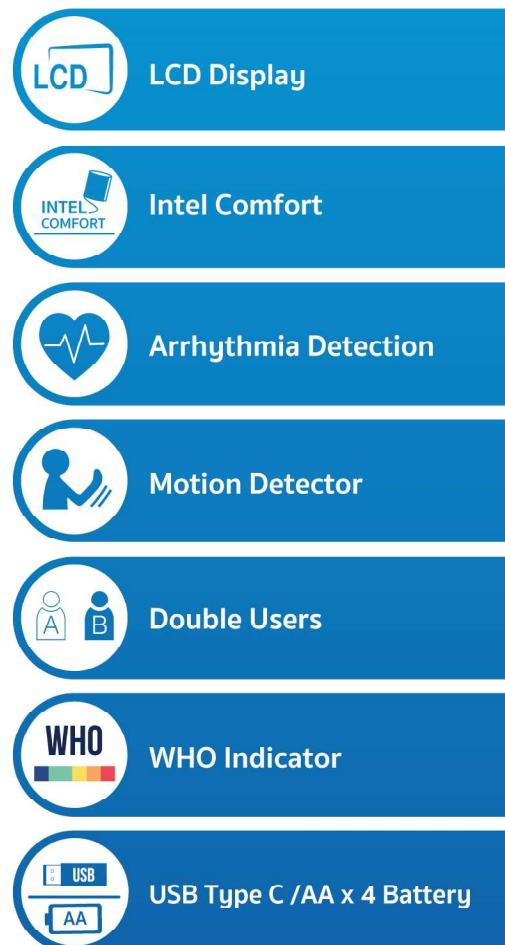

**FREE**

Bag | USB Type C

EAN no.: 8859318002426  
03.2022\_REV0001



# blue dot

Model: B-HA01



## BTE HEARING AID

- Peak OSPL 90 (dB SPL): Max. power output 130 dB
- HAF OSPL 90 (dB SPL): average output 120 dB
- Peak Gain(dB) : Max. gain 46 dB (output minus input)
- HAF/FOG Gain (dB) : average gain 38 dB
- Frequency range(Hz) : 500-4500Hz
- Distortion: 500Hz : 5% | 800Hz : 3% | 1600Hz : 1%
- Equivalent Input Noise (dB): 28 dB



- Voltage: DC 1.5V
- Current:  $\leq 2.5$  mA
- Operating time/full battery A675 1 pc. approx. 200 hours (depend on environment when using)

- Adjustable volume 4 levels
- Battery type: Alkaline 1.4 V
- Dimension 10 x 45 x 40 mm. | Weight 6 g. (without battery)

### Accessories


- Eartip 5 size
- Cleaning brush 1 pc.
- Battery A675 (Mercury Free) 2 pcs.



**FREE**

# blue dot

Model: B-HA02



## BTE HEARING AID

- Peak OSPL 90 (dB SPL): Max. power output 130 dB
- HAF OSPL 90 (dB SPL): average output 120 dB
- Peak Gain(dB) : Max. gain 50 dB (output minus input)
- HAF/FOG Gain (dB) : average gain 40 dB
- Frequency range(Hz) : 300-5000 Hz
- Noise reduction Mode : 4 mode selectable
- Distortion: 500Hz : 5% | 800Hz : 3% | 1600Hz : 3%
- Equivalent Input Noise (dB): 28 dB

- Voltage: DC 3.7 V
- Current:  $\leq 2$  mA
- Charging time : 4 - 6 hours
- Operating time/1 time fully charge approx. 80 hours (depend on environment when using)
- 4 mode Noise reduction
- Adjustable volume 4 levels
- Sound alert when the battery is weak
- Battery type: Lithium Battery (60mA)
- Dimension 14 x 40 x 45 mm. | Weight 7 g.

### Accessories

- Eartip 5 size
- Cleaning brush 1 pc.
- Power adapter with USB cable
- Storage box



โปรดเลือกจุกหูฟังที่สามารถใส่เข้ากับรูหูได้อย่างพอดี



FREE

EAN no.: 8857127365084  
07.2022\_REV.0001

เอกสารเผยแพร่ในบริษัทฯ ใช้สำหรับพนักงานขายศึกษาเท่านั้น

# blue dot™

## NEBULIZER

Model. B-NB01



- Compressor Nebulizer
- Suitable for Children and Adults
- Sound Level :  $\leq 52$  dB
- Nebulization Pressure : 20 Kpa - 80 Kpa (0.2 bar - 0.8 bar)
- Capacity of Medicine Cup :  $\leq 8$  ml.
- Free Flow Rate : 4 L/min - 7 L/min
- Nebulization Rate :  $\geq 0.20$  ml/min
- Particle Size MMAD :  $\leq 5$   $\mu$ m
- High nebulisation capacity : 24 min (6 ml)
- On-Off Switch
- Dimensions (WxLxH) : 81 x 123 x 53.9 mm
- Weight 228 g.



**FREE!**



Little duck doll  
"Luka"

### Accessories

Adult Mask 1 pc. , Children's Mask 1 pc. ,  
Air Tube 1 pc. , Mouthpiece 1 pc. , Medicine Cup 1 set ,  
Air Filters 5 pcs. Adapter 1 pc.

**1 Year Warranty**

EAN no.: 8859318002457  
12.2020\_REV.0000

# blue dot



Suitable for those at risk  
That will have a low amount of  
oxygen in the blood.

- Bedridden Patient
- Elderly people
- Heart failure.
- Chronic obstructive pulmonary diseases.
- Bronchial asthma.
- Climbing / Hiking.

## PULSE OXIMETER

### Model: B-PO091

- Connect data via Bluetooth® to applications on smartphone.
- SpO<sub>2</sub> value.
- Pulse Rate (bpm) value, Waveform and Bar graph.
- Perfusion Index (PI%).
- Alarm for over limit SpO<sub>2</sub>.
- Pulse rate sound with ON/OFF function.
- Manual display rotation: 4 directions.
- 1" Dual-color High Resolution OLED Display.
- Low-battery indicator
- Power supply: 1.5V AAA battery x 2pcs.
- Continuous working time ~ 20h.
- Dimension (mm.): ~62(L) x 37(W) x 32(H)
- Weight: ~52 g (with batteries)

Fingertip must have the  
following measurements:  
Thickness 7 - 25.4 mm.



#### Measuring Range

SpO<sub>2</sub>: 35% ~ 100%

PR : 30 bpm ~ 250 bpm

PI : 0.02-20%

#### Resolution

1%

1 bpm.

#### Accuracy

70% ~ 100%, Below < 70% unspecified.

±2 bpm. or ±2 % select larger



Connect data via Bluetooth®  
to applications on smartphone.

Download the free "NarigMed" app.



Android



ios

**FREE**

**LANYARD | BATTERY 2X AAA**

เอกสารเผยแพร่ในบริษัทฯ ใช้สำหรับพนักงานขายศึกษาเท่านั้น

EAN no.: 8857127365121  
05.2021\_REV0000

# blue dot



Suitable for those at risk  
That will have a low amount of  
oxygen in the blood.

- Bedridden Patient
- Elderly people
- Heart failure.
- Chronic obstructive pulmonary diseases.
- Bronchial asthma.
- Climbing / Hiking.

## PULSE OXIMETER Model: B-PO092

- SpO2 value.
- Pulse Rate (bpm) value, Waveform and Bar graph.
- Perfusion Index (PI%)
- Notify (SpO2) below the limit.
- Notify Pulse Rate high/low the limit.
- Pulse rate sound with ON/OFF function.
- Manual display rotation: 4 directions.
- TFT Display : 23.5 x 12.5 mm.
- Low-battery indicator
- Power supply: 1.5V AAA battery x 2 pcs.
- Dimension (mm.): ~34.2(W) x 61.8(L) x 33.9(H)
- Weight: ~27.8 g.

Fingertip must have the  
following measurements:  
Thickness 7 - 25.4 mm.



### Measuring Range

SpO<sub>2</sub>: 35% ~ 100%

PR : 30 bpm ~ 250 bpm

PI : 0.02-20%

### Resolution

1%

1 bpm.

### Accuracy

70% ~ 100%, Below < 70% unspecified.

±2 bpm. or ±2 % select larger

**FREE**

**LANYARD | BATTERY 2X AAA | BAG**


EAN no.: 8857127365206

04.2022\_REV0000

# blue dot®

## B-FT102 BT

Infrared Thermometer



### 2 in 1

**Forehead & Ear**

Body temperature can be measured both forehead and ear

• **ANTIBACTERIAL AND ANTIVIRAL**

Antibacterial housing kills up to 99.9% of surface bacterial to keep your family safe

• **Modern and Stylish Design with Extra-large**

LED display clearly visible in the dark

Accurate reading in one second 25 x 21.55 mm.

• **Transfer data via Bluetooth to Smart bluedot app in a smartphone**

• **Infrared measurement**

• **Measurement of forehead-ear, object temperature**

• **Measurement range** :32.0°C -43.0°C (89.6°F~109.4°F)

• **Accuracy** :35.0°C-42.0°C ± 0.2°C Other range +0.3°C(5°F)

• **Resolution** : 0.1°C / 0.2°F

• **Displays measurements in °C / °F**

• **Measurement time** 1s

• **Measuring distance** 3-5 cm.

• **Color-coded Fever alerts LED**

● **Green** : <37.5°C (<99.5°F) One short beep

● **Yellow** : 37.5°C ~ 38.5°C (99.5°F ~ 101.3°F) 2 times of double short beep

● **Red** : >38.5°C (101.3°F) 3 times of double short beep

• **32 memories function to track fever**

• **Auto power-off** 20s

• **Acoustic signal when measurement is complete**

• **Sound control (on/off)**

• **Low battery indicator**

• **2 x 1.5V AAA batteries**

• **Dimension(LxWxH)** : 35 x 41x 143 mm.

• **Weight** : 81 g. (with battery)



Bluetooth



**Normal**

<37.5°C (<99.5°F)



**Warning**

37.5°C~38°C  
(99.5°F~100.4°F)



**Fever**

≥38°C(100.4°F)



Download Application "Smart bluedot" Free

works with



Smart bluedot



Compatible with

• ios 12.0 or higher

• Android 6.0 or higher

**5 years warranty**

EAN no.:8857127365312

08.2023\_REV.0000

\*Tested by an independent third-party laboratory according to ISO 22196:2011: up to 99.9% reduction in surface concentration of E.coli and Staphylococcus aureus.

# blue dot

Model: B-FT031



• Measure under the armpits, mouth, or anus.

• Large LCD display  
25 x 12.5 mm.

• Swing Switch  
Swing the product to activate.

• Show quick measurement  
results in 60 seconds

## DIGITAL THERMOMETER

- Swing the product to activate
- The measurement unit shows of °C
- Large LCD display (LxW) 25 x 12.5 mm.
- Show quick measurement results in 60 seconds
- There is a beep sound when the measurement is complete
- Waterproof, Shockproof, can be disinfected with alcohol
- Measure under the armpits, mouth, or anus
- Browse the last results after 1 measurement
- Auto power off
- Battery life more than 5000 times of continuous operation
- Power Consumption 0.15milliwatts in measurement mode
- With protective cover
- Dimensions 128 x 21 x 11 mm.
- Weight 15 grams including battery



Protective cover

- Rated output range  
: 32.0°C ~ 43.0°C  
: Below 32.0°C display L°C  
: Above 43.0°C display H °C

- Accuracy  
: ±0.1°C (37.0°C ~ 39.0°C)  
: ±0.2°C (35.°C ~ 36.9°C)(39.1°C ~ 42.0°C)  
: ±0.3°C (32.0 ~ 34.9°C)(42.1°C ~ 43.0°C)

EAN no.: 8857127365039  
08.2021\_REV.0000



body composition scale




Download Application  
"Smart blue dot"



Supported version  
• ios 12.0 +  
• Android 6.0 +

## B-BF101 Smart Body Composition Scale

- User identification weighing scale on the smartphone application
- Automatic transfer of data via Bluetooth after opening the app.
- Standing surface made of safety glass: Thickness 5 mm.
- Black LED display: white illumination
- Equipped with a high-precision "strain gauge" sensor.
- Displays measured weight and body fat on the scale screen.  
(Shows body score, body age, weight, body fat, body mass index, metabolic rate, visceral fat, muscle, bone mass, protein, body water, skeletal muscle. of the body on the application)
- Digit size: : 21 mm.
- Adjustable between kg, lb
- Automatic on-off function within 35 seconds
- Low battery indicator
- Maximum weight of 180 kg.
- Graduation  
: 100 g. (weight, bone mass, muscle)  
: 0.1% (body fat, protein, body water)
- Power: 3 x AAA 1.5V (DC 4.5V)
- Product size ~ 278(W) x 278(L) x 24(H) mm.
- Product weight : ~ 2.4 kg.

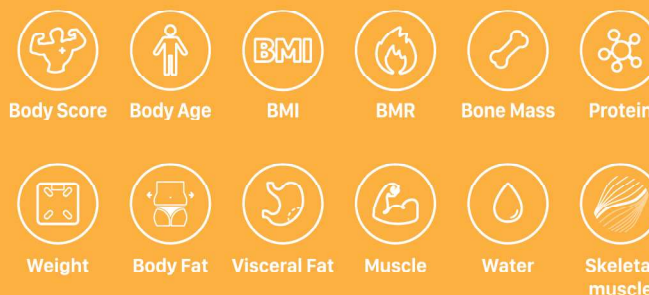





## Memory foam neck pillow

B-NP241

### Specification

- Made from high grade Memory Foam, higher density than general sponges.
- Soft and comfortable, not easily collapsed.
- Supports the head shape very well and tightens the nape.
- Pillow case are made from high quality fabrics, soft and comfortable touch with anti-irritate for skin.
- Passed OEKO-TEX STANDARD 100
- Come with buttons attached to help prevent the pillow from sliding.
- Lightweight, easy to carry and suitable for every journey.
- The pillow case is removable for cleaning.
- Size 33 x 30 x 11 cm.
- Weight 275 grams.

### วิธีการดูแลรักษา



Wash at or below 30 °C



Do not tumble dry



Do not iron



Do not dry clean



Do not bleach

**OEKO-TEX®**  
CONFIDENCE IN TEXTILES  
**STANDARD 100**




13.HCN.22099 HoHENSTEIN HTTI



## Bluedot battery A675

- Batteries for hearing aids
- Model: Size: A675
- 1 pack contains 6 pieces.
- High quality
- Life time about 200 hours
- Diameter 11.6 mm.
- Thickness 5.4 mm.
- Weight 1.62 grams (per pack)
- Capacity 560 mAh
- Power 1.45 volts
- Mercury free
- Shelf life 1 year
- ISO 9001 standard, safe against hazardous substances

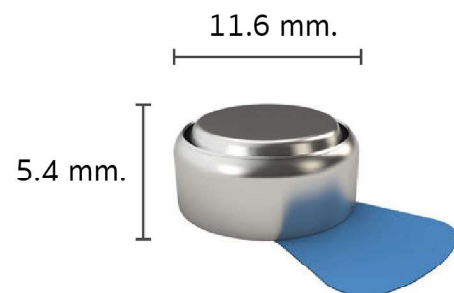



The box of life



Automatic digital  
**BLOOD PRESSURE MONITOR**

**Comfort  
Sense**



**Model: L-BM01**

- LCD screen, Size : 54 x 64 mm.
- Intel Comfort
- Irregular heartbeat detection
- Motion detection
- Risk indicator (WHO standard)
- Average of the last 3 measurements
- 60 Memories / person ( 2 person )
- For upper arm circumferences from 23-33 cm.
- Automation switch-off
- Low battery indicator
- Incl. 4 x 1.5V AA batteries
- Size 93(W) x 120(L) x 59(H) mm.
- Weight 226 g. (without batteries)
  
- Measuring Range:      Cuff Pressure: 0-290 mmHg  
                                    Pulse: 40~180 bpm
- Accuracy:                 Pressure:  $\pm 3$  mmHg  
                                    Pulse:  $\pm 5\%$  of the reading



**1 Year Warranty**

EAN no.: 8859318002433  
08.2023\_REV.0000



## BTE HEARING AID L-HA01

Peak OSPL 90 ( dB SPL ) : maximum power output 130 dB  
 HAF OSPL 90 ( dB SPL ) : average output 120 dB  
 Peak Gain(dB) : maximum gain 46 dB (output minus input)  
 HAF/FOG Gain (dB) : average gain 38 dB  
 Frequency range(Hz) : 500-4500Hz  
 Distortion: 500Hz : 5% | 800Hz : 3% | 1600Hz : 1%  
 Equivalent Input Noise (dB): 28 dB

- Voltage: DC 1.5V
- Current: ≤2.5 mA
- Adjustable volume 4 levels
- Battery type: Alkaline 1.4 V (A675)
- Dimension 10 x 45 x 40 mm. | Weight 6 g. (without battery)

**1 year warranty**



Operating time/full battery A675 1 pc.  
**approx. 200 hours**  
 (depend on environment when using)

### Accessories

- Eartip 5 size
- Battery A675 (Mercury Free) 2 pcs.
- Cleaning brush 1 pc.





**Double Eartip**

**S**

**M**

**L**

**XL**

**Eartip 5 size**

## BTE HEARING AID L-HA02

Peak OSPL 90 (dB SPL): Max. power output 130 dB  
 HAF OSPL 90 (dB SPL): average output 120 dB  
 Peak Gain(dB) : Max. gain 50 dB (output minus input)  
 HAF/FOG Gain (dB) : average gain 40 dB  
 Frequency range(Hz) : 300-5000Hz  
 Distortion: 500Hz : 5% | 800Hz : 3% | 1600Hz : 3%  
 Equivalent Input Noise (dB): 28 dB

- Voltage: DC 3.7 V
- Current: ≤2 mA
- Charging time : 4 - 6 hours
- 4 mode Noise reduction
- Adjustable volume 4 levels
- Sound alert when the battery is weak
- Battery type: Lithium Battery (60mA)
- Dimension 14 x 40 x 45 mm. | Weight 7 g.

**1 year warranty**

### Accessories

- Eartip 5 size • Cleaning brush 1 pc.
- Power adapter with USB cable
- Storage box



Operating time/full battery A675 1 pc.  
**approx. 80 hours**  
 (depend on environment when using)





# Pulse Oximeter



Notify (SpO2) above or below the limit.

Alm		on
Pulse	Beep	off
SpO2	Lo	94
PR	Hi	130
PR	Lo	50
Restore		off
+/-		+
<b>Exit</b>		

## Model: L-PO02

- SpO2 value.
- Pulse Rate (bpm) value, Waveform and Bar graph.
- Perfusion Index (PI%)
- Notify (SpO2) above or below the limit.
- Manual display rotation: 4 directions.
- TFT Display : 23.5 x 12.5 mm.
- Turn on / off sound heart rate.
- Low-battery indicator
- Power supply: 1.5V AAA battery x 2 pcs.
- Dimension (mm.): ~34.2(W) x 61.8(L) x 33(H)
- Product Weight: ~27.8 g.

## Specification

SpO2 Range: 35~100%  
 Accuracy: ±2%, 70%~100%, Below 70% unspecified  
 Resolution: 1%

Pulse Rate Range:30-250 bpm  
 Accuracy: ±2 bpm  
 Resolution: 1 bpm

PI% Range: 0.02-20%

Fingertip must have the following measurements: 7 - 25.4 mm.

## Accessory

Pulse Oximeter (1 pc), Lanyard (1 pc),  
 AAA batteries (2 batteries),  
 EN-TH instruction manual (1 set)

**2 year warranty**

EAN no.: 8857127365138  
 04.2022\_REV0001





**Lifebox Asia Company Limited (Head Office)**  
26, Soi Sukhumvit 62, Phra Khanong Tai, Phra Khanong, Bangkok 10260  
Tel : (+66)65-507-8989 email : sale@lifeboxasia.com